





Local Alarm
Strobe
"Optional"



Local Alarm
Horn
"Optional"




PureAire LEL monitor is mounted closest to the risk area. LEL monitor has dual level built in alarm relays for connecting remote horns and strobes. LEL monitor requires 24 VDC power.

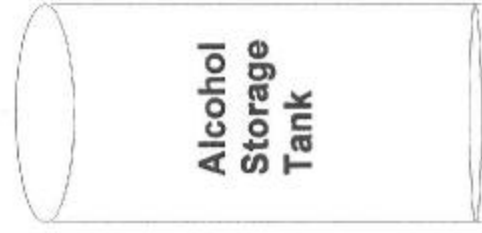

24VDC
PSU



Remote Concentration
Display



Use General Cable 3 cond 18 awg
stranded shielded cable or equal

REVISIONS

No.	CHANGE	DATE	NAME

DRAWING TITLE:

LEL monitor layout

PureAire Monitoring Systems, Inc