


# ST-48 Dual Gas Monitor with Alarm Relays

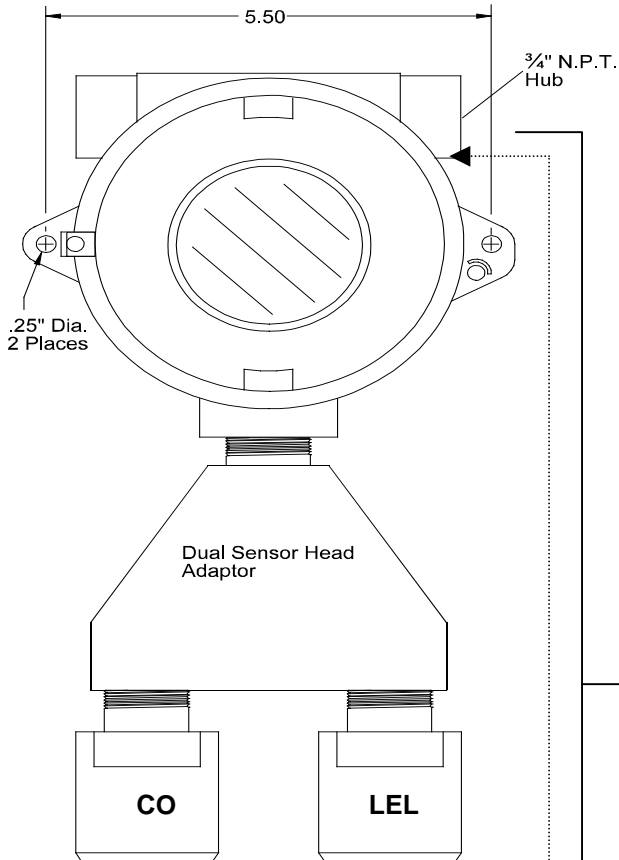

ST-48 Dual Transmitter/Controller Individual sensors for CO and LEL combustibles Two Digital gas concentration displays Two User selectable Alarm relays One instrument Fault relay Built-in visual alarms for each gas 24VDC powered 100mA NEMA 4X IP 65 enclosure 4-20mA datalog output Wall mounted transmitter/controller

Dual User Selectable Alarm Relays form C (SPDT) relays rated for 5 amp at 30 VDC or 240 ~VAC RESISTIVE Higher current devices, i.e. exhaust fan requires a separate relay contactor to handle high motor current

Supervised 4-20mA output to PLC 4mA = 0ppm 20mA = Full scale

Regulated PSU  
110VAC  
24VDC 1.0 amp



1140 Ensell Road  
Lake Zurich, Illinois 60047  
www.pureairemonitoring.com  
847-726-6000